


NO-DRILL BRACKET PART# DO25RC
COMPONENT BREAKDOWN

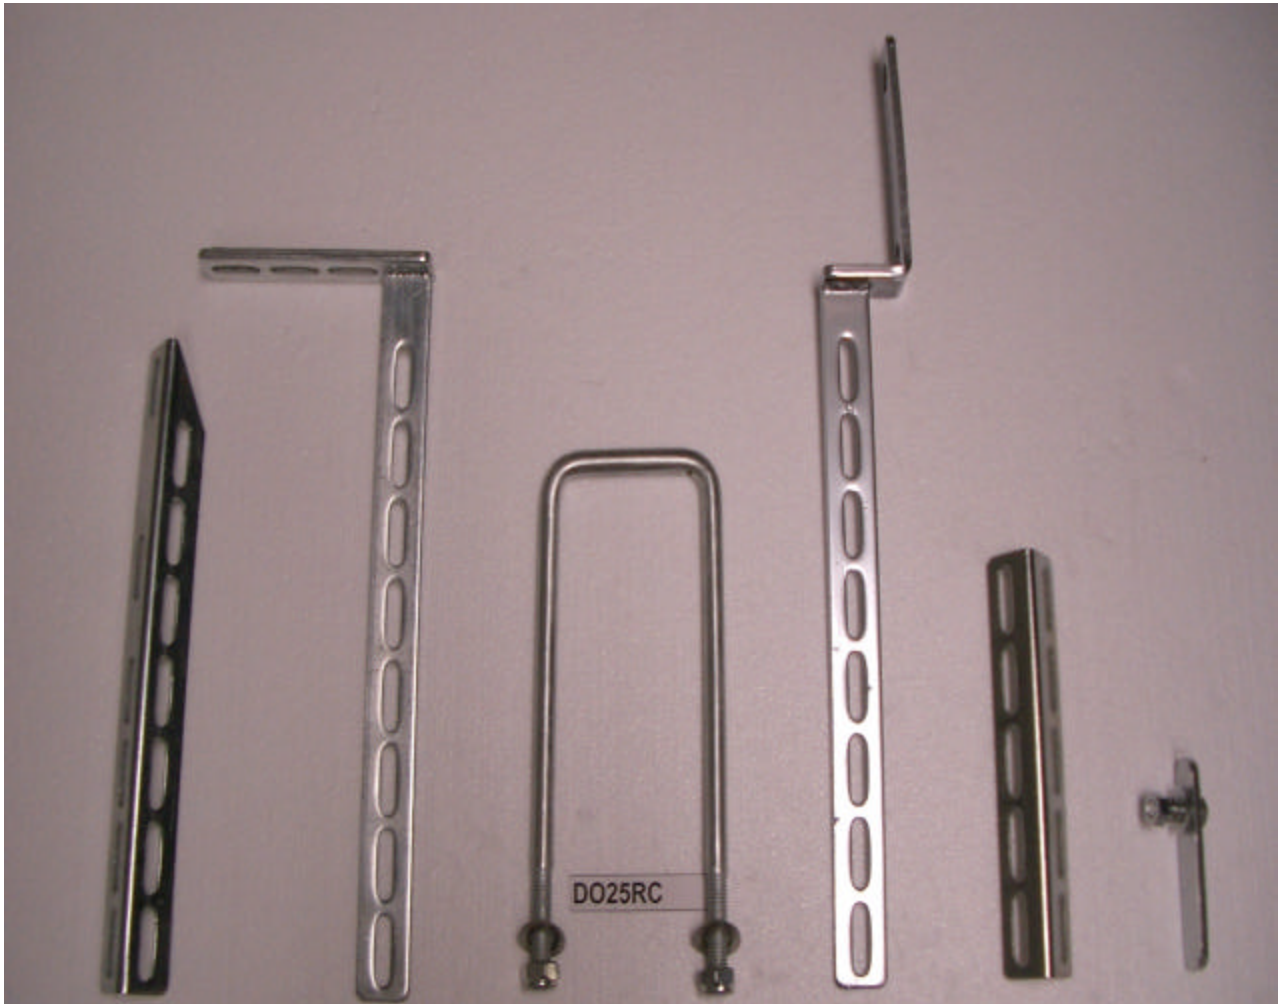

#1
6 pcs

#2
2 pcs


#3
2 pcs

#4
2 pcs

#5
4 pcs

#6
6 pcs

DODGE NO-DRILL BRACKET#1 SPECIAL INSTRUCTIONS

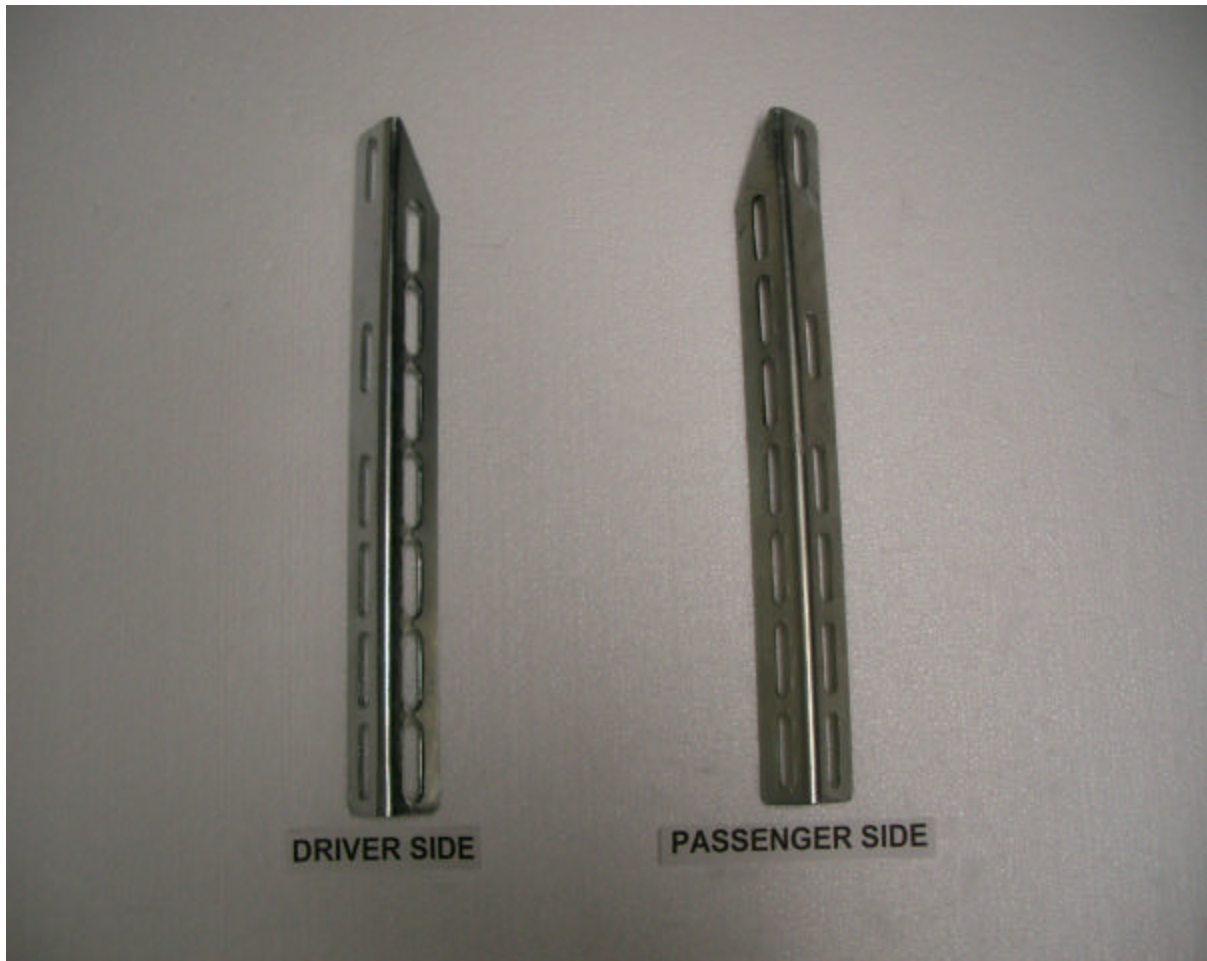

For all Dodge no-drill brackets, please take note of the following special instructions for Bracket# 1.

DRIVER SIDE

1. The top face of Bracket# 1, the face without the diagonal cut, should be facing up. This is the part where the bottom of the runner board would be connected to.
2. The side face of Bracket# 1, the face with the diagonal cut, should be pointing towards the outside of the vehicle. The diagonal cut has been placed so that Bracket# 1 will not be seen from the driver side of the vehicle once the running board has been installed.

PASSENGER SIDE

1. The top face of Bracket# 1, the face without the diagonal cut, should be facing up. This is the part where the bottom of the runner board would be connected to.
2. The side face of Bracket# 1, the face with the diagonal cut, should be pointing towards the outside of the vehicle. The diagonal cut has been placed so that Bracket# 1 will not be seen from the passenger side of the vehicle once the running board has been installed.

NO-DRILL BRACKET PART# DO25RC

02-06 DODGE RAM 2500/3500 SLT REGULAR CAB

NOTE: All instructions are for the driver side unless otherwise specified. For the passenger side, orientation of the main frame bracket will be reversed and sequence of the main frame, pinch weld, and extension brackets will also be reversed for proper alignment.)

A. FRONT BRACKET



PICTURE# 1



PICTURE# 2



PICTURE# 3



PICTURE# 4

1. Look for hole on chassis located after the chassis bushing assembly (Picture# 1). Insert nut plate, Bracket# 6, into the hole making sure not to drop the plate inside the chassis by spreading out the wires welded to the nut plate (Picture# 3). Install Bracket # 2 on the nut plate (Picture# 1).
2. Locate existing hole on the inside panel of the pinch weld. This hole is covered by a protective tape that needs to be removed (Picture# 2). Insert nut plate, Bracket# 6, into this hole making sure that the nut plate does not fall in by spreading the wires welded to the nut plate (Picture# 3). Install Bracket# 5 onto the nut plate.
3. Align Bracket#1 with Bracket# 2&5. Tighten down with 2 bolts, 4 washers, 2 lock washers, and 2 nuts (Picture# 3). Follow special instructions for Bracket# 1 installation.

B. REAR BRACKET



PICTURE# 1



PICTURE# 2



PICTURE# 3

1. Towards the back of the cab, look for the part of the chassis where it starts bending upwards. Loop the u-bolt, Bracket# 3, over the chassis making sure that the emergency brake wire is cleared (Picture# 1&3).
2. Install Bracket# 4 onto the u-bolt using self locking nuts (Picture# 2).
3. Locate existing hole on the inside panel of the pinch weld. This hole is covered by a protective tape that needs to be removed. Insert nut plate, Bracket# 6, into this hole making sure that the nut plate does not fall in by spreading the wires welded to the nut plate. Install Bracket# 5 onto the nut plate.
4. Align Bracket#1 with Bracket# 4&5. Tighten down with 2 bolts, 4 washers, 2 lock washers, and 2 nuts (Picture# 3).